

SLP-DX220

2인치 직접 감열식
데스크탑 라벨 프린터



창고관리



우편·택배




병원·약국



관광·외식

Slim and Premium

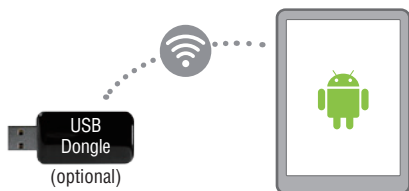

비즈니스 환경에 유연

- 안드로이드 태블릿 PC와 연동을 위한 SDK 지원
- 윈도우, 리눅스, 맥 PC용 드라이버 지원
- 옵션형 무선통신 지원: USB dongle 타입의 WLAN
- 다양한 유선통신 지원: USB, Serial, Ethernet



프리미엄급 제품 설계

- 최고 6 ips (152 mm/sec)의 인쇄속도
- 대용량 메모리 탑재로 빠른 데이터 처리
- 2인치 이하 용지전용 슬림한 디자인
- 에너지 고효율 제품



인텔리전트 기능 탑재

- Smart Media Detection™은 용지의 타입과 라벨의 길이를 프린터 스스로 판별해 인쇄하는 기능입니다.
- Intelligent Leap-over™는 용지에서 비어있는 라벨을 발견하면 자동으로 그 다음 라벨에 출력하는 기능입니다.



BIXOLON®
a Better Solution for your Business™

SLP-DX220

2인치 직접 감열식 데스크탑 라벨 프린터



Standard



Peeler

우수한 호환성

주요 프로그래밍 언어와 호환성이 높습니다.



BPL-Z™

BPL-E™

사용자 중심의 디자인


- 다양한 타입의 센서가 탑재되어 있습니다.
- 용지 가이드를 조절해 손쉽게 용지 교체가 가능합니다.



Transmissive sensor
(Gap, Media sensor)



Reflective sensor
(Black Mark Sensor)



Min. width 15mm

빅솔론 Label Artist™

엑셀, 텍스트, 액세스 파일 등으로 작성된 데이터베이스를 불러와 출력하거나 사용자가 직접 라벨 디자인을 변경할 수 있는 프로그램을 무상으로 제공하고 있습니다.

제품사양

Printer Specifications

Print Method	Direct Thermal
Print Speed	SLP-DX220: Up to 6 ips (152 mm/s) SLP-DX223: Up to 4 ips (100 mm/s)
Print Resolution	SLP-DX220: 203 dpi SLP-DX223: 300 dpi
Print Width	SLP-DX220: Up to 54 mm SLP-DX223: Up to 56.9 mm
Print Length	6 ~ 2000 mm
Sensor	Transmissive, Reflective (adjustable), Head open

Media Characteristics

Media Type	Gap, Black Mark, Notch, Continuous, Fan-Fold
Media Width	15 ~ 60 mm
Media Roll Diameter	Up to 130 mm
Media Thickness	0.06 ~ 0.20 mm
Supply Method	Easy Paper Loading

Physical Characteristics

Dimensions (WxLxD)	120 x 230 x 170 mm (4.72 x 9.05 x 6.69 inch)
Weight	1.36 kg (2.99 lbs.)
Power	EnergyStar Certified, External Power Adaptor 100-240V AC, 50/60Hz

Performance Characteristics

Memory	64MB SDRAM, 128MB FlashROM
Interface	Dual Interface Standard: USB + Serial Optional: USB + Ethernet + WLAN* * WLAN: 802.11b/g/n USB dongle type (optional)

Environment Characteristics

Temperature	Operating: 0 ~ 40°C (32 ~ 104°F) Storage: -20 ~ 60°C (-4 ~ 140°F)
Humidity	Operating: 10 ~ 80% RH Storage: 10 ~ 90% RH

Software

Emulation	SLCS, BPL-Z™, BPL-E™
Driver / Utility	Windows Driver (Euro Plus/Seagull), OPOS Driver, Linux CUPS Driver, Mac Driver, Virtual COM USB/Ethernet Driver, Utility Program, Label Artist™
SDK	Android SDK, Windows SDK

Fonts / Graphics / Symbolologies

Fonts	• 10 SLCS Resident Bitmap Fonts • One SLCS Resident Scalable Font • 16 BPL-Z™ Resident Bitmap Fonts • One BPL-Z™ Resident Scalable Font • 5 BPL-E™ Resident Bitmap Fonts • 23 Code Page • Unicode supported (UTF-8, UTF-16LE, UTF-16BE)
Graphics	Supporting user-defined fonts, graphics, formats, and logos
Barcode Symbolologies	1D: Codabar, Code 11, Code 39, Code 93, Code 128, EAN-13, EAN-8, Industrial 2-of-5, Interleaved 2-of-5, Logmars, MSI, Plessey, Postnet, GS1 DataBar (RSS-14), Standard 2-of-5, UPC/EAN extensions, UPC-A, UPC-E, IMB 2D: Aztec, Codablock, Code49, Data Matrix, MaxiCode, MicroPDF417, PDF417, QR Code, TLC39

Options

Ethernet, WLAN (USB dongle type), Peeler, Auto Cutter, RTC (Real Time Clock)

BR-SLP-DX220-KR-SEP15-V1

Copyright © BIXOLON Co., Ltd. All rights reserved.

Features and specifications are subject to change without prior notice.

BIXOLON®

www.bixolon.com



BIXOLON Co., Ltd.

경기도 성남시 분당구 판교역로 241번길
20 (삼평동 685) 7~8층 (우13494)

Tel 031 218 5500

Fax 031 218 5589

E-mail sales@bixolon.com

BIXOLON America Inc.

3171 Fujita St Torrance,
CA 90505, USA

Tel +1 858 764 4580

Fax +1 310 257 6869

E-mail sales@bixolonusa.com

BIXOLON Europe GmbH

Tiefenbroicher Weg 35, 40472
Düsseldorf, Germany

Tel +49 211 68 78 54 0

Fax +49 211 68 78 54 20

E-mail sales@bixolon.de